

GS6S30H

STANDARD MATERIALS AND CONSTRUCTION

FRAME: 18-GA. galvanized steel, channel or flanged type.

BLADE: 18-GA. galvanized steel. Blades approximately 4" on centers.

SCREEN: (When indicated)

½" sq. mesh, 19-GA. galvanized steel (.041").

CONSTRUCTION: Riveted and/or welded, full jambs with blades, head and sill

contained within.

OPTIONS

Frames and Blades of other gauges

Material - 304 or 316 Stainless steel, Copper, Aluminum, etc.


Finishes - Enamels, Epoxies, etc.

Screens - Insect screen 18/16 aluminum mesh,

- -or- ½" flattened aluminum, .051",
- -or- 1/4" sq. mesh, 18-GA galvanized steel, .047",
- -or- ½" sq. mesh, 18-GA stainless steel, .047", Others available.

NOTES

- 1. ½" nominal deduction will be made to the opening size given.
- 2. Approximate shipping weight is 11.0 lbs./sq.ft.

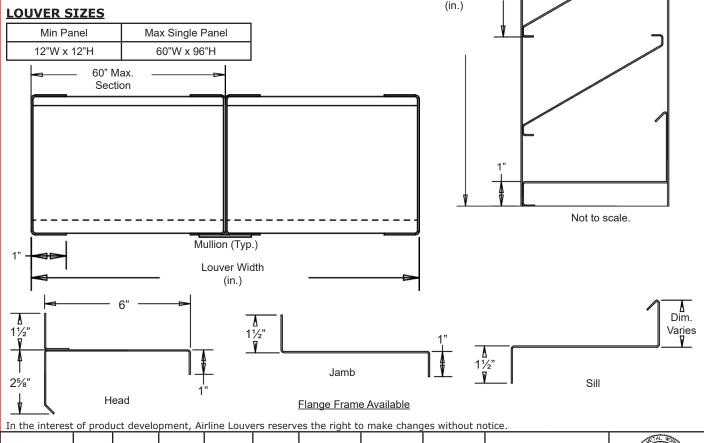

Louver Height

Item #	Qty	Width	Height	Width	Height	Mullion	Type	Location			
		Opening Size		Louver Size		Mullion	Screens				<u>Union Made</u>
Arch. / Eng. :						EDR:		ECN:		Job:	
Contractor:											
Project:						Date:		DWN:		DWG:	
4000 B : E 1 B 1 C 20E B : E 1 1 MB 20C07 B (F70) 420 7070 E (F70) 420 7070											